Australian Concrete Mats Pty Ltd
ABN. 50 644 323 848
PO Box 94 ALSTONVILLE NSW 2477

T. 02 5629 1223 M. 0480 234 521
sales@concretemats.com.au
www.ConcreteMats.com.au

# Technical Data Sheet for Australian Concrete Articulated Concrete Block Mats with Stainless Steel Cable.

[CODES: AB12.2412.SS08]

## DESCRIPTION

An Articulated Concrete Block Mat is a concrete block revetment mat system designed to control various types of erosion due to water, wind and vehicular traffic.
The system is made up of a 2.4m long x 1.2m wide x 120mm in height mats that are placed side by side and clamped together to provide one homogeneous system.
The mats consist of concrete blocks interlocked by with Stainless Steel cable. Each mat is made up of concrete blocks that are tapered, consisting of a 3x6 blocks pattern to making up a mat.
The interconnecting cable allows the Mats to articulate and form to the terrain and contour of the ground.

## 1. MATERIALS

Articulated Concrete Cable Block Mats are manufactured from individual concrete blocks interconnected together with Stainless Steel Cable.

**TABLE 1: Manufacturing Material Information**

| PRODUCT CODE | CONCRETE BLOCKS | INTERCONNECTING MATERIAL | BREAKING STRAIN (Approx) |
|---|---|---|---|
| **AB12.2412.SS08** | 50 MPA, Wet-Cast Portland Cement | 8mm 316 Stainless Steel Cable | 3900kg |

### 2.1 Concrete Blocks [Code:AB12.2412]

Each mat is typically 2400x1200mm, made from 18 individual 50 MPA concrete blocks interlocked by stainless-steel cables, which connect through each block in both directions. There is a 15mm spacing (at base) between blocks to provide an opening. The finished blocks are manufactured with concrete conforming to the cement requirements of AS 3600 and to the aggregate requirements of AS 2758. Blocks have a minimum weight of 34kg per block and placed no further than 15mm apart. Material weight per square meter is approximately 214kg. Each block has a 120mm high profile, 290x290mm on the top face and 390x390mm at the bottom face.

Concrete shall have a minimum compressive strength requirement as per Table 3 and certified by a third party.

**TABLE 2: AB Block Mats Manufacturing Values and General Characteristics**

| | |
|---|---|
| Mat Dimensions | 1200mm W x 2400mm L x 120mm H |
| Mat Weight (Approx) | 214kg per m2 or 616kgs per mat |
| Individual Concrete Block Size (Approx) | Top face: 290x290mm, Bottom face: 390x390mm, Height 120mm |
| Blocks Per Mat | 18 blocks per mat |
| Spacing between blocks | 115mm (at top) and 15mm (at base) |

| TABLE 3: Concrete Compressive Strength Requirements | |
|---|---|
| AGE | REQUIRED COMPRESSIVE STRENGTH |
| 7 - Day | 38MPa |
| 14 - Day | 50MPa |
| 28 - Day | 61MPa |
| *NOTE: Concrete reaches its optimum 50MPa strength 28 days after pouring.* | |

## 2.2 Interconnecting Cable - 8mm Stainless Steel Cable

MIAMI STAINLESS
MILL TEST CERTIFICATE / CERTIFICATE OF INSPECTION

CHARACTERISTICS*

- 8mm Stainless Steel Cable
- Ultra high quality ProRig AISI 316 marine grade stainless steel wire rope
- 7×19 strand is a flexible stainless steel wire rope with a braided surface and bright finish
- Reliable breaking strains and corrosion resistance

| Table 4 - Miami Stainless - Manufacturers Test Certification Contents* | | | |
|---|---|---|---|
| | | *(This table data was copied from Miami Stainless Certificate. Refer to Original Copy of Certificate- request copy from ACM)* | |
| **Purchaser:** | Miami Stainless | **Reel No.** | 401-409 |
| **Cert No.** | QS7032-0023 | **Sampling:** | 401 |
| **Date of Issue:** | 27 Jul 2020 | | |
| **1. TYPE/GRADE*** | | | |
| **Construction:** | 7x19 | **Diameter:** | 8.00 mm |
| **Grade:** | AISI 316 | **Length:** | 305 m x 9 R/L |
| **Lay:** | RHRL | **Specification:** | DSR C 207 |

| SS CABLE ROPE TEST RESULTS* | | |
|---|---|---|
| **ITEMS** | **NOMINAL OR SPECIFIED** | **ACTUAL** |
| **Diameter:** | 8.00 ~ 8.40 | 8.21 MM |
| **Breaking Strength:** | 37.44 KN | 37.41 KN |
| **Lay Length** | 6.0 ~ 8.0 X Cable Dia | 6.6 x Cable Dia |
| **Preforming** | Good | Good |

| WIRE TEST RESULTS* | | | | |
|---|---|---|---|---|
| **No/Items** | **Diameter** | | **Tensile Strength** | |
| | **Nominal** | **Actual** | **Nominal** | **Actual** |
| 1 | 0.480 – 0.520 mm | 5.520 mm | 1620 N/mm2 | 1812 N/mm2 |

| CHEMICAL COMPOSITION (%)* | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| **Heat No** | C | Si | Mn | P | S | Ni | Cr | Mo |
| **S40326** | 0.053 | 0.399 | 1.579 | 0.0313 | 0.0058 | 10.742 | 17.104 | 2.033 |
| **Remark** | Actual B/S: | | 3919.4 KGF | | | | | |

*(*Referenced from Miami Stainless Information Sheet – Request your copy from ACM directly.)*

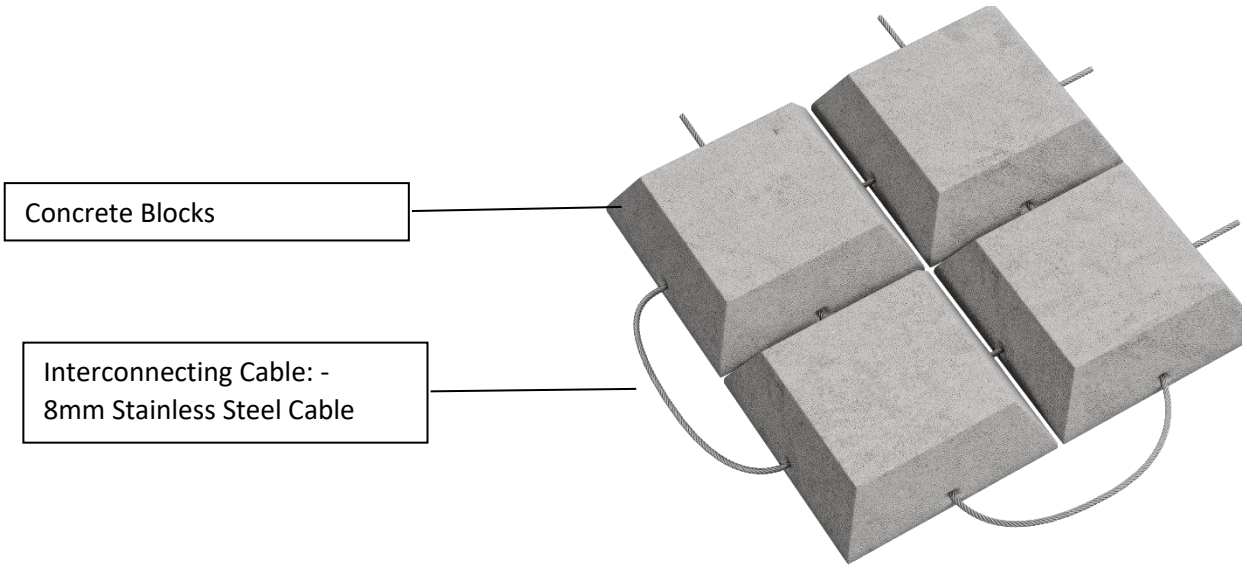


## 3. TRANSPORT

Articulated Concrete Cable Block Mats can be stacked (up to 4 layers) on a pallet for transportation. Pallets should not be stacked more than 2 high on top of each other. Upon delivery, mats may be left exposed for up to 90 days. If exposure will exceed 90 days, cover or tarp the mats to minimise UV exposure.

| **Transport and Handling Block Mats Size and Weight Detail -** | | | |
|---|---|---|---|
| *For safety and ease of transport and handling the AB Block Mats are stacked and strapped onto a large pallet for transportation. Loops of rope or cable are overhanging from sides of mats stacks.* | | | |
| **[Code: AB12.2412]** | ONE MAT<br>(No Pallet) | PALLET w 2 MATS | PALLET w 4 MATS |
| **DIMENSIONS** | 1200.W x 2400.L x 120.H | 1200.Wx 2400.L x 390.H<br>(inc Pallet) | 1200.W x 2400.L x 650.H<br>(inc Pallet) |
| **WEIGHT (kg)**<br>*(Dry Weight)* | 616kg | 1300kg<br>(inc Pallet) | 2550kg<br>(inc Pallet) |

## 4. CLAMPS

Stainless Steel Cable Clamps should be used to connect adjoining Articulated Concrete Cable Block Mats. The standard placement of clamps shall be placed on 800mm centres connecting adjoining mats together. A minimum of 4 clamps per mat. In areas of high-water flow velocities exceeding 3.5 m per second we recommend the clamps should be designed by an Engineer who is familiar with the project and site conditions.

## 5. ANCHORING

Anchoring is to be designed by an engineer for the water flow rates, soil and site conditions. Individual mats can be placed next to each other and joined together using stainless steel zip ties/or cable clamps. Mats are tethered together using the external rope or cable loops.

Anchoring the mats down will require an engineer's design. This is to be completed by an engineer who is familiar with the design parameters of the project. Eg soil condition, hydraulic flow rates and loads.

Note: The Australian Concrete Block Mat Install Anchor Handling Guide is only a guide as each site has differing parameters.

## 6. PERFORMANCE

To date no full-scale laboratory testing has been performed by an independent third-party testing facility with associated engineered calculations to certify the hydraulic flow capacity of the Articulated Concrete Block Mat. This will be updated when available.

| **TABLE 7: AB Block Mat Performance Values –** [CODE: AB12.2412.SS08] | |
|---|---|
| Breaking Strain | Approx 3900kg |
| Expected Design Life | 50+years Non-Vegetative, 100+ years Vegetative |
| Percentage Open Area | 20% |
| Modulus of Rupture (load capacity) | 14.2 – 16.4 MPa |
| Maximum Flow Velocity | *See noted above. To request calculation formulas contact our office on; sales@concretemats.com.au* |

## 7. EQUIPMENT

Provide the proper equipment to place the mat that will not damage the mat material or disturb the soil subgrade. The individual mats require a minimum four-point lift system design, using a spreader bar and lifted by adjacent loops.

## 8. CONSTRUCTION

Prior to installing prepare the subgrade as detailed in the plans that have been designed by an engineer for the project. All subgrade surfaces to be smooth and free of all rocks, stones, sticks, roots, and other protrusions or debris of any kind that would result in an individual block being raised more than 20mm above the adjoining blocks. Finish and level the top layer of soil/rock as per project engineer design. Install mats to the line and grade shown on the plans and per the engineers' requirements. When vegetation is required, distribute the seed on top of the Geofabric cloth. Cover with topsoil and water.

The engineer or authorised representative will provide technical assistance during preparation and installation of the concrete block mats as needed. Provide a minimum 450mm deep concrete mat embedment toe trench at all edges exposed to concentrated flows. Recess exterior edges subject to sheet flow a minimum of 150mm. Provide fastening or anchoring as recommended by the engineer for the site conditions.

Concrete Mats are not to be driven on until 28 days from manufacturing date on label of each mat.

## 9. MEASUREMENT

This Item will be measured by the square metre or linear metre.

## 10. MORE INFORMATION

For more information, please visit our website www.ConcreteMats.com.au. Contact our office. sales@concretemats.com.au or telephone 02 5629 1223 or M. 0480 234 521